



# Enerdrive

DRIVING YOUR ENERGY NEEDS

## ePOWER B-TEC

### LiFePO4 12v 100Ah & 125Ah Lithium Battery

Enerdrive are proud to introduce the new ePOWER B-TEC Lithium Battery range with Bluetooth™ Technology.

Available in both 12v, 100Ah or 125Ah capacities including Bluetooth™ battery monitoring. The ePOWER B-TEC is designed and intended for use in deep cycle applications where a single battery is required that meets the amp hour capacity.


### Bluetooth™ Monitoring System

The Enerdrive ePOWER B-TEC battery incorporates wireless Bluetooth™



Monitoring Technology. By downloading the Android™ or Apple® app to your smartphone or tablet device, you can monitor the following information;

- Battery Capacity
- Battery Voltage
- Battery Current (Amps)
- Battery State of Charge (SOC)
- Battery State of Health (SOH)
- Battery Status
- Individual Cell Voltage
- Battery Temperature
- Battery Cycles
- Battery Alarms
- Battery Event Information

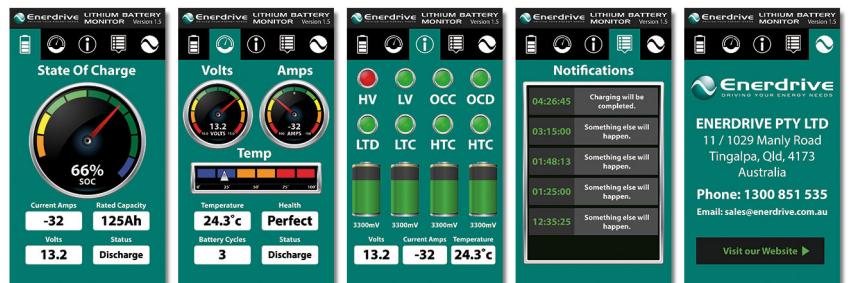

**Enerdrive**  
DRIVING YOUR ENERGY NEEDS

Unit 11, 1029 Manly Road, Tingalpa, 4173  
Ph: 1300 851 535 | Fax: 07 3390 6911  
Email: sales@enerdrive.com.au  
www.enerdrive.com.au

# Specifications

Enerdrive B-TEC 12v Lithium Battery Technical Data		
Normal Specification	EPL-100BT-12V	EPL-125BT-12V
Nominal Voltage	12.8V	
Nominal Capacity	100Ah	125Ah
Cycle Life (DOD - 80% under controlled conditions)	≥2000 Cycles	
Standard Charge Specification (Lithium profile charger required)		
Battery Charge Temperature	0 - 45°C	
Normal Charge Voltage CV/CC*	14.40 - 14.60V	
Standby (Float) Voltage	13.50 - 13.80V	
Maximum Charge Current	60A @ 25°C for 30mins	80A @ 25°C for 30mins
Recommended Charge Current for Maximum Life	≤33A	≤40A
Standard Discharge Specification		
Battery Discharge Temperature	-20 - 60°C	
Battery Output Voltage Range	11.00 - 14.60V	
Maximum Discharge Current	100A @ 25°C ±5°C for 30mins	
Pulse Discharge Current	450A for 1.0s	
Discharge Cut-off Voltage	≤11.20V	
Circuit Protection		
The battery is supplied with a LiFePO4 Battery Management System (BMS) that can monitor and optimize each single prismatic cell during charge & discharge, to protect the battery pack from overcharge, over discharge & short circuit. Overall, the BMS helps to ensure safe and accurate operation of the battery.		
Over-Charge Protection		
Over-charge Protection Per Cell	3.90V ± 0.03V	
Over-charge Release Per Cell	3.60V ± 0.05V	
Over-charge Release Method	Discharge below release voltage	
Over-Discharge Protection		
Over-discharge Protection Per Cell	2.80V ± 0.05V	
Over-discharge Release Per Cell	3.20V ± 0.05V	
Over-discharge Release Method	Apply Charge/Voltage ≥12.8v	
Over Current Protection		
Discharge Over Current	110A for 30s – 450A for 1s	
Protection Reset Time	5s Auto Release	
Over Current Release Method	Disconnect Load	
Over Temperature Protection		
Battery Discharge Over Temperature	Protection to 65°C ± 5°C Release at 50°C ± 5°C	
Battery Charge Over Temperature	Protection to 55°C ± 5°C Release at 45°C ± 5°C	
Short Circuit Protection	Auto release after 5s	
Mechanical Characteristics		
Dimensions	Length 318mm	
	Width 165mm	
	Height 215mm	
Weight	Approx 12.6 Kg	Approx 15.0 Kg
Storage Information		
Temperature & Humidity Range	≤30 days -20°C to 35°C, 45 to 75% RH	
	≥30 days -10°C to 30°C, 45 to 75% RH	
Self-discharge Rate	≤3%Per Month	

\* CV/CC, Constant Voltage – Constant Current Lithium Charge Profile

## Battery Management System

The battery is also equipped with an internal LiFePO4 Battery Management System (BMS) that can monitor and optimize each Prismatic cell within the battery during normal operation. It will protect the battery pack from over charge, over discharge, over temperature & short circuit. The BMS helps to ensure safe and accurate operation of the battery.

## Size & Weight Savings

### Lithium v AGM Capacities;

- 100Ah Lithium = 160Ah AGM
- 125Ah Lithium = 200Ah AGM

(Based on standard depth of discharge for both Lithium (80%) and AGM (50%).)

The ePOWER B-TEC battery provides 60% more usable power than its equivalent lead acid cousin and being nearly 50% lighter and 30% smaller makes for a superior alternative.

The ePOWER B-TEC battery is perfect for camper trailers, 4WD's (AUX battery), caravans, small water craft, low power communication sites or any other application that requires the use of a single deep cycle battery that meets the amp hour capacity.


With over 5 years of researching, designing and testing lithium batteries and the associated charging systems, Enerdrive are at the forefront of lithium battery systems in Australia. Enerdrive are the only Australian company that can supply a fully integrated self-branded energy system to suit your setup.

With over 1200 complete systems in operation Australia wide, Enerdrive is regarded as the leader in the field of lithium batteries and energy systems for Mobile, Marine and Remote applications.

**PLEASE NOTE;** The ePOWER B-TEC battery is not designed to parallel connect extra batteries to increase the overall capacity. This is due to the internal management system (BMS) which does not have the ability of physical connection to a second B-TEC BMS system for balancing of the cells between each battery.

If you are requiring a battery system larger than the ePOWER B-TEC 100Ah or 125Ah battery, please visit [www.enerdrive.com.au](http://www.enerdrive.com.au) and look at the Enerdrive Lithium Power Pack Systems which can offer this level of cell balancing protection.

## Battery Dimensions:

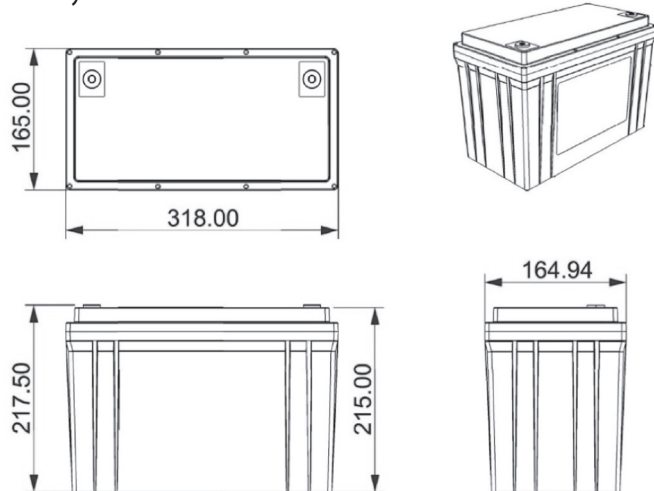

Dealer:

Visit [enerdrive.com.au](http://enerdrive.com.au)  
for more information

ePOWER B-TEC Lithium Batteries are only available from your nearest Enerdrive dealer. Find your local dealer by visiting:  
[www.enerdrive.com.au/where-to-buy-enerdrive-products/](http://www.enerdrive.com.au/where-to-buy-enerdrive-products/)



Manual