



Specifications:

Model: ED62240	
Nominal Voltage	6V
Rated Capacity	
20 Hour Rate (11.2A to 5.25V)	224.0Ah
Hourly rate conversion capacity	
10 Hour Rate (21.0A to 5.25V)	210.0Ah
5 Hour Rate (38.4A to 5.25V)	192.0Ah
Dimension and Weight	
Length	260±2mm
Width	180±2mm
Height	247±2mm
Total Height	253±2mm
Weight	30.5Kg
Casing Material	ABS
Self discharge Rate (25°C)	≥91% /3 month

Discharge Characteristics

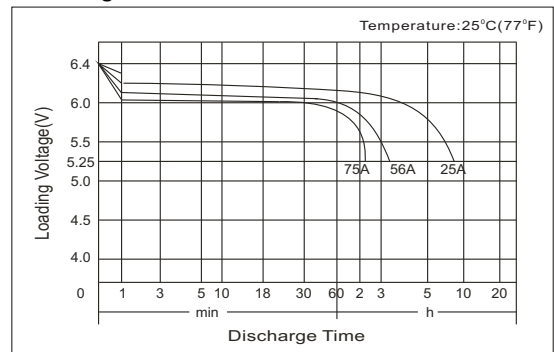

Cycle life in relation to Depth Of Discharge

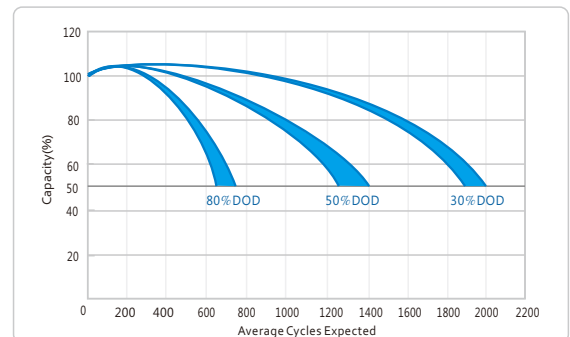

Operating Temperature Range

Discharge	-15°C (5°F) ~ 50°C (122°F)
Charge	0 °C (32°F) ~ 40°C (104°F)
Storage	-15°C (5°F)~40°C (104°F)

Charging Methods

Float Use	6.75V (25°C), Compensation co-efficient-3mv/cell/°C
Cycle Use	7.41V (25°C), Compensation co-efficient-5mv/cell/°C
Max Charge Current	0.18C(A)

Applications:	Electric vehicle, solar power, wind power, Medical, Toys
---------------	--