

# DC105-12 DATA SHEET



## DC105-12

**105AH@20HR**  
**12-Volt**

**DEEP CYCLE**

**Maintenance-Free**  
**Sealed AGM Battery**

### Nominal Specifications

Battery Model	DC105-12	Rated Capacity	105AH/20HR
---------------	----------	----------------	------------

### Mechanical Specifications

Group Size	27	
Overall Height (H)	216.9±2mm	8.54"
Container Height (h)	210.9±2mm	8.30"
Length	306.5±2mm	12.07"
Width	167.6±2mm	6.60"
Weight	Approx.30.6kg	67.46bs.
Terminal Type	M8- Button Terminal	
Terminal Torque	9.6-10.7 N.m	
Container Material	ABS: Standard (UL 94-HB)	

### Electrical Specifications

C100	116AH
C20	105AH
C10	90AH
C5	86AH
CCA	560A
CA or MCA	660A
HPCA	780A
Max. Discharge Current	1000A (5s)
Internal Resistance	3.8mΩ

### Reserve Capacity

Reserve @25 AMPS	170 Minutes
Reserve @75 AMPS	40 Minutes


### Temperature Range Specifications

Operating Temperature Range	Discharge: -15°C ~ +50°C (5°F ~ 122°F)
	Charge: -15°C ~ +40°C (5°F ~ 104°F)
	Storage: -15°C ~ +40°C (5°F ~ 104°F)
Recommended Operating Temperature Range	+74°F (23°C) to +80°F (27°C)
Self-Discharge	Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F); Fully recharging is required before usage, For higher temperatures the time interval will be shorter.

### Charge Voltages

Float Charging Voltage	13.5 to 13.8 VDC/unit @ (25°C)	
Equalization and Cycle Service Charging Voltage	14.3 to 14.5 VDC/unit @ (25°C)	
Maximum Charge Current(A)	25A	
Charging Temperature Compensation	Cycle use	-4mV/cell/°C
	Float use	-3mV/cell/°C

### BATTERY & TERMINAL DIMENSIONS (All units shown in mm)

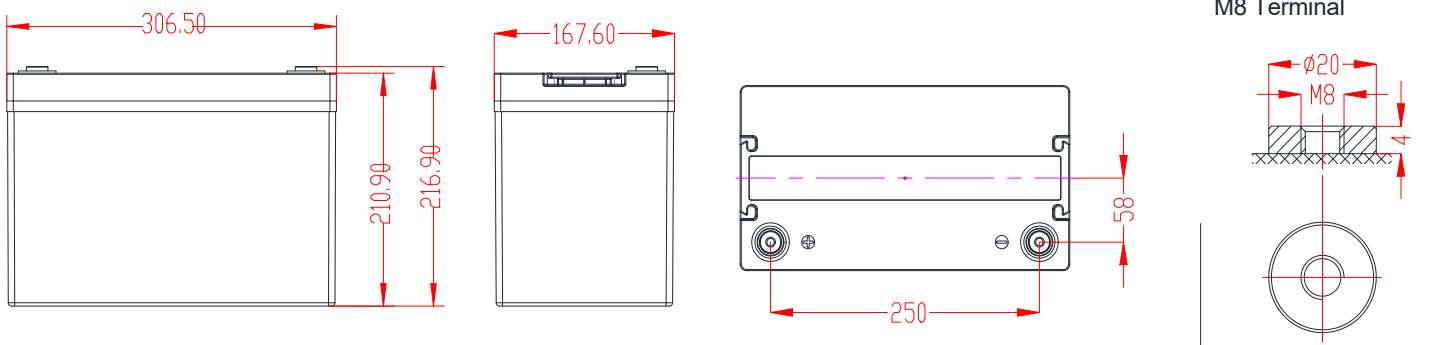

### Constant Current Discharge Rating Amperes @ 77°F (25°C)


Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H
1.75V	145	93	69	56.8	30.1	22.6	15.9	10.9	9.00	7.67	5.25

**Note** The above data are average values, and can be obtained with 3 charge/discharge cycles. These are not minimum values.




# DC105-12 DATA SHEET


## Terminal Voltage(V) and Discharge Time

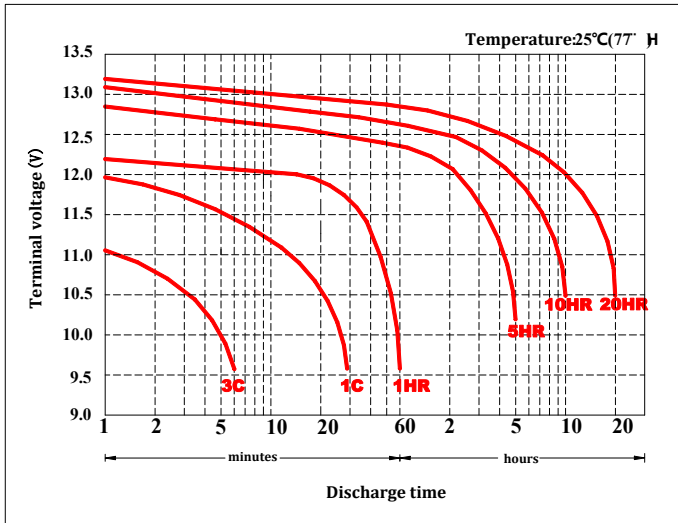


## Duration of discharge vs. Discharge current

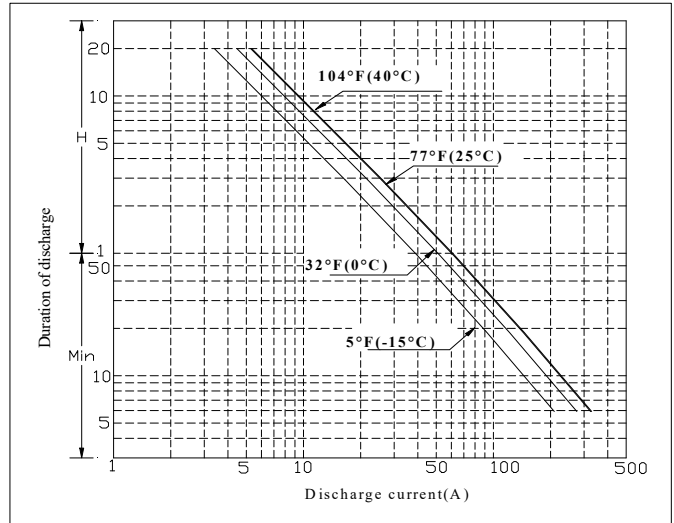


## Percent Capacity vs. Temperature

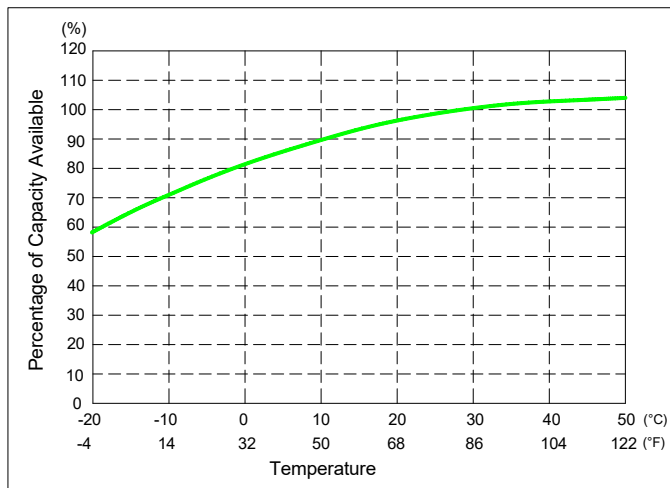

## State of Charge(SOC) vs Open Circuit

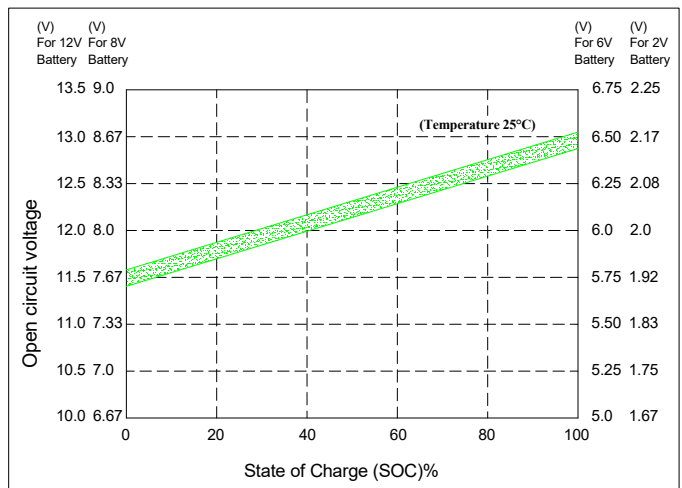

## Capacity Retention Characteristic

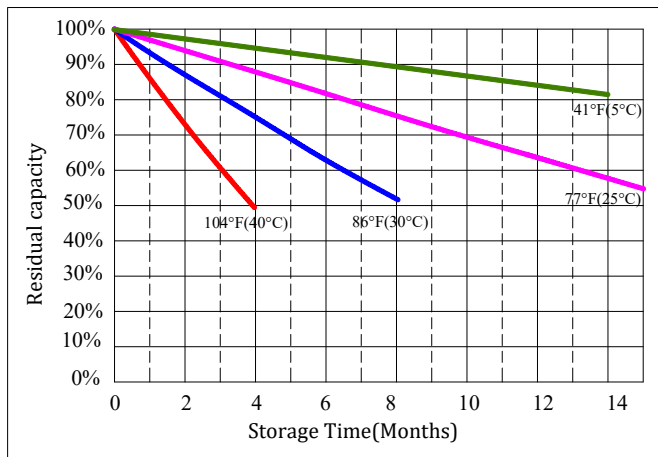

## Cycle Life vs. Depth of Discharge(DOD)

